


Aluminum MultiView Doors

Amarr[®]3582

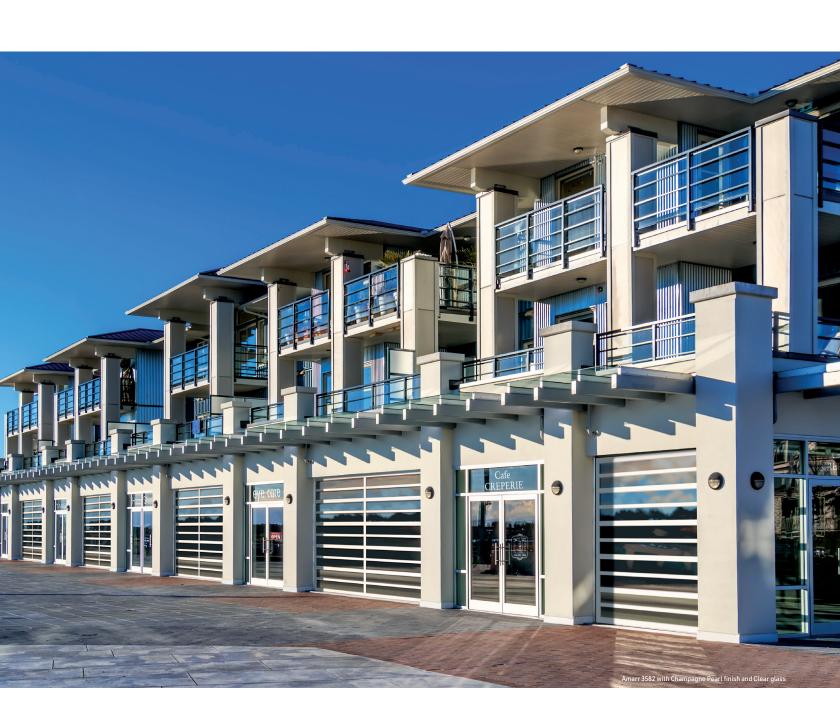

Amarr 3582 Aluminum MultiView doors make a unique design

statement with the widest single piece of glass that specifications,

safety, and reliability standards allow. Constructed of 2" thick extruded aluminum stiles and rails featuring the WaterLok joint and glazing seal system with new and improved wide tongue and groove section joints (June 2024) with leading-edge bulb seal and bottom weather seal for enhanced air-tight and water-resistant performance. With a wide selection of glazing options, in more than two dozen paint and anodize finishes, the Amarr 3582 is a distinctive choice for any building where style and functionality are important.




CONSTRUCTION

Amarr 3582

MultiView Aluminum door

- 2" thick extruded aluminum rails & stiles
- WaterLok joint and glazing seal system featuring new and improved wide tongue and groove section joints (June 2024) with leading-edge bulb seal and bottom weather seal for enhanced air-tight and waterresistant performance.
- Equal glass heights in all sections of a door
- Glass expanses up to 8'2"wide



Track: All Amarr doors are available with both 2°or 3° track in Standard Lift, High Lift, Vertical Lift, Low Headroom, and Follow the Roof Pitch. Custom track configurations are also available. For drawings and more information, please visit www.amarr.com.

Springs: Torsion springs are oil tempered, helical wound and custom computed for each door for a minimum 10,000 cycle life. Optional springs are available up to 100,000 cycle life.

Standard Hardware: Galvanized steel hinges and track brackets. All rollers have minimum 10-ball

COLORS

Actual color may vary from samples shown.

In Stock Finishes







Special Order Finishes

Longer lead time and price upcharge may apply.

WHITE Powder Coat (WH)

SPECIFICATIONS

	Amarr 3582
MATERIAL	Aluminum
CONSTRUCTION LAYERS	Single
DOOR THICKNESS	2" (5.1cm)
SECTION HEIGHTS ¹	Varies by door height
MINIMUM DOOR WIDTH	2' 0"
MAXIMUM DOOR WIDTH	20' 2" (in 1"increments)
MINIMUM DOOR HEIGHT ¹	6'0"
MAXIMUM DOOR HEIGHT ¹	20'1"
CLEARVIEW STRUT SYSTEM	Only required for doors ≥ 16'
WIND LOAD ² AVAILABLE	NA
FINISH WARRANTY ³	5 Years
WORKMANSHIP/HARDWARE WARRANTY ³	1 Year
GLASS WARRANTY ³	1 Year

¹ For complete section and door height configuration charts, visit amarr.com or contact your local Amarr dealer. 2 It is your responsibility to make sure your garage door meets local building codes.

local Amarr dealer

ODIZE			
	CHAMPAGNE (AH)	COPPER (AC)	MEDIUM BRONZE (AM)

PAINT PVDF (Kynar®) & Powder Coat















†PVDF only.

GLAZING OPTIONS

	Single Pane			Insu	lated								
		Temp	pered		Lami- nated	Pol	ycarbon	ate		Acrylic		Temp	ered
	3/16"	3/16" Low-E	1/4"	1/4" Low-E	1/4"	Single 1/8"	Single 1/4" [†]	Tri-Wall 5/8"	1/8"	1/4"	1/2"	1/2"	1/2" Low-E
CLEAR	•	•	•	•		•	•	•	•	•	•	•	•
OBSCURE	•												
GREEN	•		•									•	•
BRONZE	•		•					•				•	•
GRAY	•		•									•	•
GREYLITE	•		•									•	•
FROST	•		•					•				•	
SNOW					•			•					
WHITEOUT					•								
BLACKICE					•								





RAL & CUSTOM COLORS AVAILABLE FOR PVDF & POWDER COAT

	PVDF (Kynar*)	Powder Coat
FADE RESISTANT	++	+
CORROSION RESISTANT	++	+
UV RESISTANT	++	+
ABRASION RESISTANT	+	++
STANDARD COLORS	26	21
RAL/CUSTOM COLOR PRICE UPCHARGE	\$	\$\$
TOUCH-UP PAINT	Included	Not Included


Longer lead time and price upcharge apply

ĺ	TOUCH-UP PAINT	Included	Not Included
	RAL/CUSTOM COLOR PRICE UPCHARGE	\$	\$\$
ĺ	STANDARD COLORS	26	21
	ABRASION RESISTANT	+	++
	UV RESISTANT	++	+

DOOR CONFIGURATIONS

†Also available in abrasion resistant.

For Single Pane Glazing				
Door Width	# Center Stiles	#Windows/Section		
Up to 8'2"	0	2		
8'3"-16'2"	1	4		
16'3" - 20'2"	2	6		



For Insulated Glazing				
Door Width	# Center Stiles	#Windows/Section		
Up to 10' 2"	1	4		
10'3" - 16'2"	2	6		
16'3" - 20'2"	3	8		

Up to 10'2" Wide - 2 Panels	10'3"-16'2" Wide - 3 Panels
16'3"-20'2" Wide - 4 Panels	

Amarr Company

Part of ASSA ABLOY

165 Carriage Court Winston-Salem, NC 27105 800.503.DOOR www.amarr.com

Sectional door products from Amarr Company may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents.

Amarr as word and logo are trademarks belonging to Amarr Company, owned by ASSA ABLOY.

©ASSA ABLOY, Printed in USA Form #6230424/7.5M/S4

