

Amarr OlympusEnergy Efficient Steel Traditional Garage Doors



When it comes to ultimate protection, Amarr Olympus doors stand tall. With triple-layer construction and a superior insulation R-value of 19.40, these durable low-maintenance doors give you the ultimate in quiet operation and energy efficiency.







PANEL DESIGNS









ENERGY EFFICIENCY



performance, select a door with a low U-factor (less heat transfer) or high R-value (more heat resistance) rating.

For the best thermal

R-value 19.40[‡]

[‡]OL3200 Short Panel True White and Flush Panel True White and Black only

Amarr®Olympus

Construction

Polyurethane Steel

STEEL

OL3138/OL3200

Triple-Layer: Steel + Insulation + Steel

For the toughest most energy-efficient steel door, Amarr Olympus triple-layer doors include the ultimate in thermal properties, plus a layer of steel for a finished interior look and added durability.

- Heavy-duty exterior and interior steel
- Durable, reliable, low maintenance
- Environmentally safe polyurethane insulation
- · Superior energy efficiency
- · Extra quiet operation

Specifications

	OL3138	0L3200
PANEL DESIGNS		
Short Panel	TW/Color Zone	•
Long Panel		•
Flush Panel	TW/Color Zone	TW/Color Zone
Long Recessed		•
INSULATION	Polyurethane	Polyurethane
U-FACTOR 📚	0.24	0.19*-0.23
R-VALUE ¹	14.46	19.40
DOORTHICKNESS	1-3/8" (3.5cm)	2" (5.1cm)
STEELTHICKNESS	27/27 ga	27/27 ga
WOODGRAIN EXTERIOR TEXTURE	•	•
END STILES Painted	•	•
BOTTOM WEATHER SEAL	•	•
INSULATED GLASS OPTION†	•	•
DOORWIDTHS	8', 9', 16'	All Standard Sizes
DOORHEIGHTS	All Standard Sizes	All Standard Sizes
WIND LOAD ² AVAILABLE	•	•
PAINT FINISH WARRANTY ³	Lifetime	Lifetime
WORKMANSHIP/HARDWARE WARRANTY ³	5 Years	Lifetime

R-value is in accordance with DASMA TDS-163.

² It is your responsibility to make sure your garage door meets local building codes

*True White Short Panel & Flush Panel only; 0.23 for [†]Price upcharge applies all other colors and panel

visit amarr.com or contact your local Amarr dealer.

> Panel only: 13.35 for all other colors and panel designs.

Verified thermal performance rating per DASMA Thermal Performance Verification Program.

‡True White Short Panel & Flush

Colors

WHITE (TW)

Actual paint colors may vary from samples shown. Price upcharge applies to all colors except True White.









designs.









BLACK



Amarr Color Zone Over 800 Sherwin-Williams®



MAHOGANY (MY) WALNUT (NT)

Amarr doors are pre-painted; homeowners can use exterior latex paint for custom colors. Visit **amarr.com** for painting instructions Painting your garage door voids the warranty.

SnapDry™ paint colors; approved color list is at amarr.com/amarr color zone Visit your local Sherwin-Williams store for paint chips.

Amarr Company 165 Carriage Court Winston-Salem, NC 27105 800.503.DOOR www.amarr.com

Door specifications and technical data subject to change without notice

Sectional door products from Amarr Company may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Amarr as word and logo are trademarks belonging to Amarr Company, owned by ASSA ABLOY.

©ASSA ABLOY. Printed in USA Form #6400825/10M/SPR

Glass Options

3/32" (0.24cm) Single Strength











†Price upcharge applies.


DecraTrim Window Inserts

Window inserts shown on Clear glass; inserts also available with Obscure, Frost and Dark Tint glass.

Insulated glass† available in Clear, Frost and Dark Tint

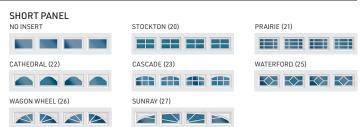



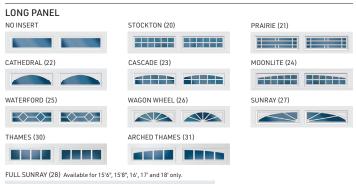

DecraGlass™Windows


Tempered obscure glass with baked-on ceramic designs: design visibility varies due to lighting

SHORT PANEL

LONG PANEL


ΗΕΔΡΤΙ ΔΝΩ (70)

TRELLIS (76)



TRELLIS (76)





839 839 839 839

030000 030000

an an an







ΙΔRDIN (75)





Mosaic Window Options



The choice is yours.

Add visual interest to your contemporary, mid-century modern or transitional home. With Mosaic Window Options you decide the number and location of windows to create the door design you want. Visit amarr.com/mosaic for design inspirations.



Amarr participates in the DASMA Thermal Performance Verification Program, The program verifies the thermal performance of a complete sectional door assembly. The lower the U-factor rating, the better the thermal performance.