Hurricane Rated

Amarr® Residential Garage Doors



www.amarr.com





SELECT YOUR WIND LOAD DOOR

	Steel Carriage House	Wind Speed Approvals*	Impact Resistant	Miami-Dade Approvals
7	AMARR CARRIAGE COURT	90–130 mph	I	
8	AMARR CLASSICA®	90–185 mph	I	M
9	AMARR HILLCREST	90–169 mph	I	
10	AMARR DESIGNER'S CHOICE	90–155 mph	I	

	Steel Traditional	Wind Speed Approvals*	Impact Resistant	Miami-Dade Approvals
10	AMARR OLYMPUS	90–155 mph	I	
11	AMARR HERITAGE®	90–190 mph	I	M
12	AMARR NORTHWOODS	90–190 mph	I	M
13	AMARR LINCOLN	90–169 mph	I	

	Specialty	Wind Speed Approvals*	Impact Resistant	Miami-Dade Approvals
15	AMARR BY DESIGN	110–175 mph	I	M
15	AXOLOTL FOR AMARR	140 mph		

	Aluminum	Wind Speed Approvals*
16	AMARR HORIZON	134–168 mph†
17	AMARR VISTA	90–151 mph


*Based on ASCE7-05 †Based on ASCE7-10

AMARR ADVANTAGE

STYLISH STRENGTH

With Amarr garage doors, you don't have to compromise style for hurricane preparedness. Almost all Amarr residential garage doors are available with a wind load reinforcement system that meets or exceeds building code requirements in your area. Whether your home is traditional or contemporary, our Amarr garage door designs can add beauty, curb appeal and long lasting value to your home.

SAFETY



Garage doors are the largest and heaviest moving object in the home. Amarr garage doors have a patented safety bottom bracket to reduce the risk of serious injuries.

SUSTAINABILITY

Amarr products are made with up to 90% recycled content and approximately 5-10% of the steel is reused at the steel mill.

ENERGY EFFICIENCY AND THERMAL PERFORMANCE

Maintain the temperature in your garage with an energy efficient garage door. For best thermal performance, select a door with a low U-factor (less heat transfer) or high R-value rating (more heat resistance). We offer a wide range of materials, insulations and door thicknesses to provide the level of energy efficiency you desire. Learn more about the thermal performance of Amarr garage doors at **amarr.com/energy-efficiency** or on page 19.

HURRICANE RATED DOORS

When installed according to our instructions and local building codes, Amarr hurricane rated garage doors:



- Withstand rapid cyclic pressure and static load forces up to 245 mph.[1]
- Resist large missile impact at 50' per second (35 mph).[2]
- May qualify for discounts on your homeowner's insurance.[3]

Meet or exceed these building codes:

- Florida Building Code (FBC)
- International Code Council (ICC)
- Texas Department of Insurance (TDI)
- High-Velocity Hurricane Zone (HVHZ)
  M (Miami – Dade and Broward Counties)

WIND LOAD APPROVED DOORS

Use a variety of reinforcement materials, including Struts and R-Trusses which are engineered to meet specific building code requirements. Amarr garage doors are tested in accordance with DASMA TDS-108. Impact glass is available in short and long panel windows on select Amarr garage doors; impact glass may shatter, but remains intact despite the force.



MADE IN USA

All Amarr residential and commercial steel and aluminum garage doors are manufactured in the USA, affirming our commitment to high quality and durability.

[1] Exposure B with a mean roof height less than 30' based on ASCE7-10. (57/-67 PSF)
[2] Option available on select models only.
[3] Check with your insurance provider for details.

AMARR CONSTRUCTION

STEEL

SINGLE-LAYER:
Steel

Amarr Classica, Heritage, Hillcrest & Lincoln

- Heavy-duty exterior steel
- Durable, reliable, low maintenance



DOUBLE-LAYER:
Steel + Insulation

Amarr Classica, Heritage, Hillcrest & Lincoln


- Heavy-duty exterior steel
- Durable, reliable, low maintenance
- Environmentally safe polystyrene thermal insulation with vinyl backing
- Energy efficient
- Quiet operation





TRIPLE-LAYER:
Steel + Insulation + Steel

Amarr Classica, Designer's Choice, Heritage, Hillcrest, Lincoln & Olympus

- Heavy-duty exterior and interior steel
- Durable, reliable, low maintenance
- Environmentally safe polystyrene or polyurethane thermal insulation
- Superior energy efficiency
- Extra quiet operation














* True White Bead Board only.
** All panels and colors except True White Bead Board.


† True White Short and Flush panels only.
‡ All panels and colors except True White Short and Flush panels.

STEEL

FOUR-LAYER:
Overlay + Steel + Insulation + Steel

Amarr Carriage Court

- Heavy-duty exterior and interior steel
- Durable, reliable, low maintenance
- Environmentally safe polystyrene thermal insulation
- Energy efficient
- Extra quiet operation




ALUMINUM

Aluminum + Glass


Amarr Vista

- 2" thick extruded commercial-grade aluminum frame for durability
- Corrosion resistant aluminum
- ClearView Strut System strengthens door without restricting view



Amarr Horizon

- Extruded aluminum frame provides durability, low maintenance and corrosion resistance
- ClearView Aluminum Strut System does not restrict viewing area and adds strength and durability
- 7' tall doors are three sections high
- Equal glass heights in all sections of a door
- Glass expanses up to 8'2" wide



Aluminum + Laminate Panel

Axolotl for Amarr


- 2" thick extruded commercial-grade aluminum frame for durability
- Tough, compact exterior laminate panels with premium Axolotl surface finish
- Image not shown

WOOD


Wood + Insulation + Wood

Amarr by Design

- Custom, handcrafted carriage house designs
- Multiple wood options
- Paint or stain grade wood
- Environmentally safe polystyrene thermal insulation
- Energy efficient



Verified thermal performance rating per DASMA Thermal Performance Verification Program. See page 19 for more information. For best thermal performance, select a door with a low U-factor (less heat transfer) or high R-value rating (more heat resistance).

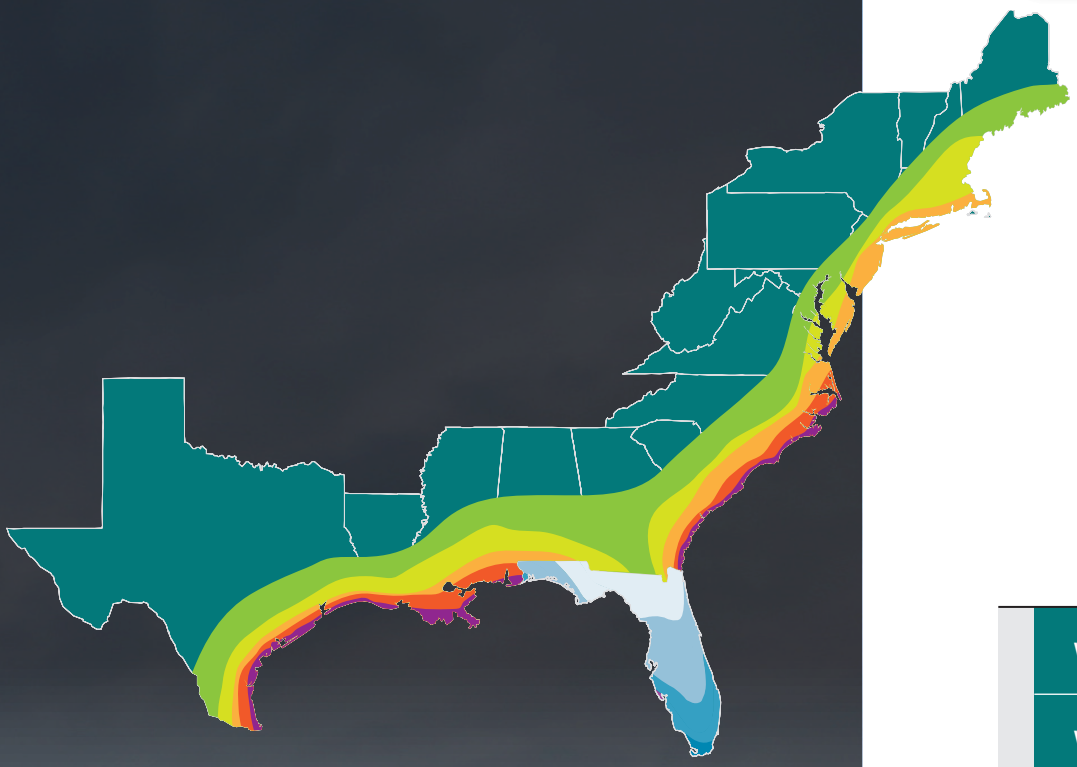

UNDERSTAND YOUR AREA WIND LOAD REQUIREMENTS

Local government regulations for wind load requirements can vary from one location to another due to door size, the door's location on the structure, and localized wind zones, among other factors. The homeowner is responsible to make sure their garage door meets local building codes.

United States East Coast & Gulf Wind Zones

Based on ASCE7-05	WindPro Rating
90 – 100 mph	WP1 & WP2
100 – 110 mph	WP2 & WP3
110 – 120 mph	WP3 & WP4
120 – 130 mph	WP4 & WP5/WP5i
130 – 150 mph	WP5-WP8 WP5i-WP10i

Based on ASCE7-10	WindPro Rating
115 – 130 mph	WP2 & WP3
130 – 150 mph	WP5
150 – 170 mph	WP4 & WP5/WP5i
170 + mph	WP6i-WP10i

WINDPRO™ CLASSIFICATION SYSTEM

Amarr WindPro classification system helps you to easily find the Amarr Wind Load door for your location. Amarr WindPro WP classification indicates the miles per hour (mph) wind speed range and impact resistance. The higher the "WP" classification, the higher the approved mph wind speed range. The "WPi" classification indicates an impact-approved door.

		ASCE 7-05	ASCE 7-10/ ASCE7-16
		WIND SPEED (MPH)	
NON-IMPACT	WP1	90-99	110-124
	WP2	100-109	125-139
	WP3	110-119	140-149
	WP4	120-129	150-164
	WP5	130-139	165-175
	WP6	140-149	176-189
	WP7	150-159	190-204
	WP8	160-169	205-219
IMPACT	WP5i	130-139	165-175
	WP6i	140-149	176-189
	WP7i	150-159	190-204
	WP8i	160-169	250-219
	WP9i	170-179	220-229
	WP10i	180+	230+

Exposure B with a mean roof height < 30'



Tanglewood design with Closed Arch in Wicker Tan/White with Versailles decorative hardware


AMARR CARRIAGE COURT

Distinctly defined. The Amarr Carriage Court collection adds increased curb appeal to your home. Built with durable composite overlay trim and insulated steel-backed sections, these garage doors provide energy efficiency, noise reduction and innovative design to your home.


DESIGNS

AVAILABLE WITH WINDOWS


Laurelbay (LB)




Pinetop (PT)




Bradberry (BB)




Kensington (KT)



Seabrook (SB)




Rosemont (RM)




NOT AVAILABLE WITH WINDOWS


Ashley (AL)




Charlton (CT)




Fairfield (FF)




Middleton (MT)




Greenbriar (GB)




Darby (DB)




Newberry (NB)




Tanglewood (TW)




Arcadia (AR)*




Ravenwood (RW)*



Brookland (BL)*



Magnolia (MG)*



*Closed Square only.

CC4000
Four-Layer:
Overlay + Steel + Insulation + Steel


CC4000
U-factor .26
R-value 6.48

Decorative Windows & Hardware
Optional decorative windows & hardware add character to your door.
See page 14 for all window and decorative hardware options.


Rosemont with Closed Square (RM104)




Laurelbay with Clear Square (LB115)




Bradberry with 3 Lite Arch (BB110)



Charlton with Closed Arch (CT105)



Darby with Closed Square (DB104)



COLORS

Actual paint colors may vary from samples shown.
Price upcharge applies to all colors except True White.



True White / White (W1)



Almond / White (A1)



Sandtone / White (S1)



Wicker Tan / White (K1)

Door, window frames, and overlay can be painted using 100% acrylic exterior latex paint with a Light Reflective Value (LRV) of 8 or higher. Contact paint manufacturer for LRV ratings.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH[1]/MPH[2] (PSF Design Pressures)	Impact Resistant	Windows Standard	Windows Impact
Amarr Carriage Court CC4000	9'	WP1-WP5	90 – 130 mph 116 – 168 mph (12.7/-14.9) – (26.4/-31.1)	Yes[3]	Yes[3]	No
	16'	WP1-WP5	90 – 130 mph 116 – 168 mph (12.1/-13.8) – (25.3/-28.7)	Yes[3]	Yes[3]	No
Lifetime Limited Warranty	18'	WP1-WP5	90 – 130 mph 116 – 168 mph (12.0/-13.6) – (25.1/-28.4)	Yes[3]	Yes[3]	No

Tested in accordance with DASMA TDS-108 [1]Based on ASCE7-05 [2]Based on ASCE7-10 [3]Option available on select models

Verified thermal performance rating per DASMA Thermal Performance Verification Program. See page 19 for more information.



Northampton design in Walnut with Canterbury decorative handles and hinges

AMARR CLASSICA

Looks can be deceiving. From a distance, you see wood. Up close, it's sturdy, durable, low-maintenance steel. Attractive and structurally strong carriage house styles that go up and down like traditional garage doors. Three-section tall designs, instead of four, help deliver a more authentic carriage house look. Deception never looked so good.

DESIGNS

CARRIAGE HOUSE

Lucern




Tuscany



Santiago



Valencia



Northampton




Bordeaux



Not available in odd heights


Cortona




Not available with Arched top

MODERN – Available in CL3000 only

Flush Panel



Full View



Not available in odd heights

CL1000
Single-Layer: Steel

CL2000
Double-Layer: Steel + Insulation

CL3000
Triple-Layer: Steel + Insulation + Steel

CL3000
U-factor .22
R-value 13.35

Decorative Windows & Hardware
Optional decorative windows & hardware add character to your door.
See page 14 for all window and decorative hardware options.

COLORS

Actual paint colors may vary from samples shown.
Price upcharge applies to all colors except True White.

True White (TW)
Almond (AL)
Wicker Tan (WK)
Sandtone (ST)
Terratone (TT)
Charcoal Gray (EF)
Dark Brown (DN)
Black (BL)

Amarr® Color Zone

See page 18 for more information.


Also available in two-tone options.

Weathered Gray (WZ)†
Golden Oak (OK)*
Walnut (NT)†
Mahogany (MY)†

*Odd heights not available in CL1000/CL2000; not available in Flush.
†Not available in Flush.

Verified thermal performance rating per DASMA Thermal Performance Verification Program. See page 19 for more information.

Lucern with Closed Square (L2)



Tuscany with Closed Arch (T1)




Bordeaux with Closed Arch (B1)



Cortona with Seine Windows (C8)



Full View with Frost glass (FVWF)



WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH[1]/MPH[2] (PSF Design Pressures)	Impact Resistant	Windows Standard	Windows Impact
Amarr Classica CL3000	9'	WP1-WP5/ WP5i-WP10i	90–180 mph 116–232 mph (12.8/-15.1) – (50.8/-59.8)	Yes	Yes	Yes[3]
Lifetime Limited Warranty	16'	WP1-WP7/ WP5i-WP7i	90–151 mph 116–194 mph (12.2/-13.8) – (33.7/-38.1)	Yes	Yes	Yes[3]
	18'	WP1-WP5/ WP5i-WP7i	90–151 mph 116–194 mph (12.2/-13.8) – (33.7/-38.1)	Yes	Yes	Yes[3]
Amarr Classica Full View CL3000	9'	WP5	130 mph 169 mph (26.7/-31.6)	Yes	Yes	Yes
	16'	WP4/WP5i	120-130 mph 156-168 mph (21.8/-24.8) – (25.3/-28.8)	Yes[3]	Yes	Yes
Miami-Dade			N/A	N/A	N/A	N/A
Amarr Classica CL1000 and CL2000	9'	WP1-WP5/ WP7i-WP10i	90–185 mph 116–235 mph (12.7/-14.9) – (54.4/-62.0)	Yes[3]	Yes[3]	No
Lifetime Limited Warranty	16'	WP1-WP6/ WP5i-WP8i	90–169 mph 116–218 mph (12.3/-13.9) – (43.4/-49.3)	Yes[3]	Yes[3]	No
	18'	WP1-WP8/ WP5i-WP7i	90–160 mph 116–205 mph (12.2/-13.8) – (38/-43.0)	Yes[3]	Yes[3]	No
M Miami-Dade	9'	WP10i	185 mph 235 mph (54.4/-62.0)	Yes	No	No
	16'	WP8i	169 mph 218 mph (43.4/-49.3)	Yes	No	No

Tested in accordance with DASMA TDS-108 [1] Based on ASCE7-05 [2] Based on ASCE7-10 [3] Option available on select models




Recessed design with Thames DecraTrim windows in Sandtone with Alpine handles

AMARR HILLCREST

Value is a beautiful thing. With the Amarr Hillcrest collection you get more than a custom carriage house look. You get exceptional style and durability with conventional hardware at a competitive price.


Bead Board design with Wagon Wheel DecraTrim in True White with Castle Rock magnetic handles and hinges



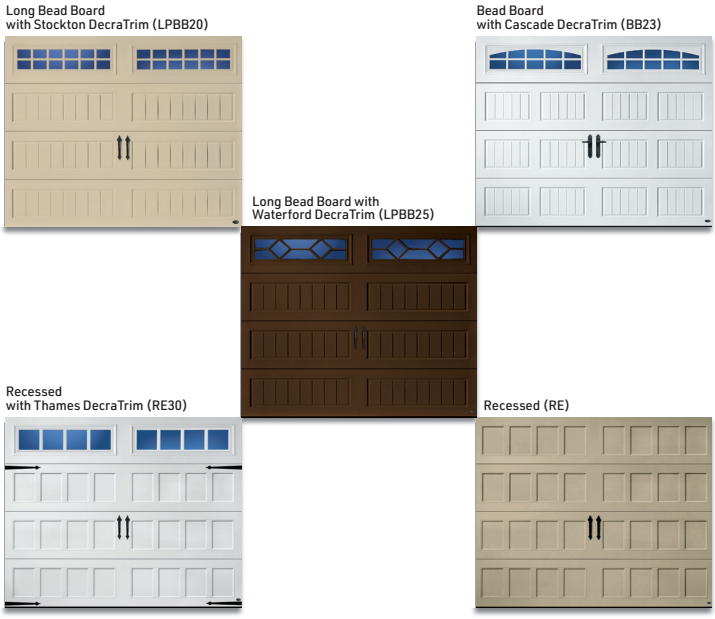


DESIGNS


Bead Board



Long Bead Board



Recessed



Decorative Windows & Hardware
Choose DecraTrim window inserts to coordinate with your home's design along with optional decorative hardware. See page 14 for all window and decorative hardware options.

HI1000
Single-Layer: Steel

HI2000
Double-Layer: Steel + Insulation

HI3138
1-3/8" Triple-Layer: Steel + Insulation + Steel

HI3000
2" Triple-Layer: Steel + Insulation + Steel

HI3000
U-factor .23
R-value 9.05

COLORS

Actual paint colors may vary from samples shown.
Price upcharge applies to all colors except True White.

True White (TW) · Almond (AL) · Wicker Tan (WK) · Sandtone (ST) · Terratone (TT) · Dark Brown (DN) · Charcoal Gray (EF) · Black (BL)

Amarr® Color Zone
See page 18 for more information.

Weathered Gray (WZ) · Mahogany (MY) · Walnut (NT)

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH[1] MPH[2] (PSF Design Pressures)	Impact Resistant	Windows Standard	Windows Impact
Amarr Hillcrest HI3000 Lifetime Limited Warranty	9'	WP1-WP6/ WP5i-WP7i	90–155 mph 123–200 mph (14.3/-16.9) – (38.0/-45.0)	Yes[3]	LP[3]	LP[3]
	16'	WP1-WP5/ WP5i-WP7i	90–155 mph 116–200 mph (12.3/-13.9) – (36.4/-41.4)	Yes[3]	LP[3]	LP[3]
	18'	WP1-WP5/ WP5i-WP7i	90–155 mph 116–200 mph (12.2/-13.8) – (36.1/-40.8)	Yes[3]	LP[3]	LP[3]
Amarr Hillcrest HI3138 Lifetime Limited Warranty	9'	WP1-WP5/ WP5i-WP7i	95–155 mph 122–200 mph (14.3/-16.9) – (38.0/-45.0)	Yes[3]	LP[3]	LP[3]
	16'	WP1-WP5/ WP5i-WP7i	90–130 mph 116–155 mph (12.3/-13.9) – (25.6/-29.1)	Yes[3]	LP[3]	LP[3]
	18'	WP1-WP5/ WP5i	90–130 mph 116–168 mph (12.2/-13.8) – (25.4/-28.7)	Yes[3]	LP[3]	LP[3]
Amarr Hillcrest HI1000 and HI2000 15-Year Limited Warranty	9'	WP1-WP8/ WP5i-WP8i	90–169 mph 116–218 mph (12.8/-15.1) – (45.2/-53.4)	Yes[3]	LP[3]	No
	16'	WP1-WP5 WP5i-WP7i	90–156 mph 116–202 mph (12.3/-13.9) – (38.0/-42.0)	Yes[3]	LP[3]	No
25-Year Limited Warranty	18'	WP1-WP6 WP5i-WP7i	90–155 mph 116–200 mph (12.2/-13.8) – (37.0/-40.6)	Yes[3]	No	No

Tested in accordance with DASMA TDS-108 [1]Based on ASCE7-05 [2]Based on ASCE7-10 [3]Option available on select models

Verified thermal performance rating per DASMA Thermal Performance Verification Program. See page 19 for more information.

STEEL



Bead Board design in True White with Blue Ridge handles



Short Panel design in True White

AMARR DESIGNER'S CHOICE


Energy efficiency makes the Amarr Designer's Choice a popular choice for garage doors. With a high R-value of 19.40†, this door gives you the ultimate in energy efficiency and quiet operation.

Bead Board design in True White with Castle Rock magnetic handles and hinges




DESIGNS


Bead Board



Long Bead Board



Recessed



Decorative Hardware
Choose decorative hardware to best coordinate with your home. See page 14 for hardware options.

DC3138*
Triple-Layer: Steel + Insulation + Steel

DC3138 U-factor .24
R-value 14.46

DC3200
Triple-Layer: Steel + Insulation + Steel

DC3200† U-factor .19
R-value 19.40

* DC3138 only available in Bead Board design in 8', 9' or 16' wide doors.
† For True White Bead Board only. 13.35 R-value for all other panels and colors.

COLORS

Actual paint colors may vary from samples shown.
Price upcharge applies to all colors except True White.

True White (TW) · Almond (AL) · Wicker Tan (WK) · Sandtone (ST) · Dark Brown (DN) · Black (BL) · Walnut (NT) · Mahogany (MY)

Amarr® Color Zone

See page 18 for more information.

DC3138 only available in True White and Color Zone.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH[1]/MPH[2] (PSF Design Pressures)	Impact Resistant	Windows Standard	Windows Impact
Amarr Designer's Choice DC3200 Lifetime Limited Warranty	9'	WP1-WP5/ WP7i	90–155 mph 116–200 mph (12.8/-15.1) – (38.0/-44.9)	Yes[3]	Yes	Yes
	16'	WP1-WP5/ WP7i	90–155 mph 116–200 mph (12.3/-13.9) – (37.0/-41.0)	Yes[3]	Yes	Yes
	18'	WP1-WP3/ WP5i-WP7i	90–155 mph 116–200 mph (12.3/-13.9) – (37.0/-40.6)	Yes[3]	Yes	Yes
Amarr Designer's Choice DC3138 Lifetime Limited Warranty	9'	WP1	90 mph 116 mph (12.8 /-15.1)	No	No	No
	16'	WP1	90 mph 116 mph (12.3 /-13.9)	No	No	No


Tested in accordance with DASMA TDS-108 [1] Based on ASCE7-05 [2] Based on ASCE7-10 [3] Option available on select models

Verified thermal performance rating per DASMA Thermal Performance Verification Program. See page 19 for more information.

AMARR OLYMPUS


Energy efficiency makes Amarr Olympus doors popular models. With a high R-value of 19.40†, these doors give you the ultimate in energy efficiency and quiet operation.

Long Panel design in True White

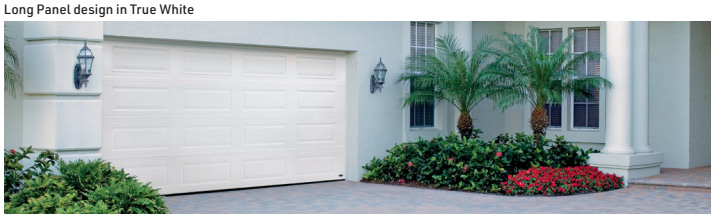


DESIGNS


Short Panel



Long Panel



Long Recessed‡



Flush Panel



Flush Panel available in True White and Color Zone only.

‡Available in OL3200 only.

OL3138*
Triple-Layer: Steel + Insulation + Steel

OL3138 U-factor .24
R-value 14.46

OL3200
Triple-Layer: Steel + Insulation + Steel

OL3200† U-factor .19
R-value 19.40

* OL3138 only available in Flush and Short Panel designs in 8', 9' or 16' wide doors.
† Short and Flush Panel True White only. 13.35 for all other panels and colors.

COLORS

Actual paint colors may vary from samples shown.
Price upcharge applies to all colors except True White.

True White (TW) · Almond (AL) · Wicker Tan (WK) · Sandtone (ST) · Dark Brown (DN) · Black (BL) · Walnut (NT) · Mahogany (MY)

Amarr® Color Zone

See page 18 for more information.

OL3138 only available in True White and Color Zone.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH[1]/MPH[2] (PSF Design Pressures)	Impact Resistant	Windows Standard	Windows Impact
Amarr Olympus OL3200 Lifetime Limited Warranty	9'	WP1-WP5/ WP7i	90–155 mph 116–200 mph (12.8/-15.1) – (38.0/-44.9)	Yes[3]	Yes	Yes
	16'	WP1-WP5/ WP7i	90–155 mph 116–200 mph (12.3/-13.9) – (37.0/-41.0)	Yes[3]	Yes	Yes
	18'	WP1-WP3/ WP5i-WP7i	90–155 mph 116–200 mph (12.3/-13.9) – (37.0/-40.6)	Yes[3]	Yes	Yes
Amarr Olympus OL3138 Lifetime Limited Warranty	9'	WP1	90 mph 116 mph (12.8 /-15.1)	No	No	No
	16'	WP1	90 mph 116 mph (12.3 /-13.9)	No	No	No

Tested in accordance with DASMA TDS-108 [1] Based on ASCE7-05 [2] Based on ASCE7-10 [3] Option available on select models


Long Panel design with Thames DecraTrim windows in Walnut

AMARR HERITAGE

Style and beauty that stand the test of time. Choose from traditional or carriage house designs to create the steel garage door you always wanted. The Amarr Heritage collection provides a low-maintenance, 2" thick steel door with a lifetime warranty. Great looks for years to come.


Long Bead Board design with Moonlite DecratTrim in True White with Blue Ridge handles and hinges




DESIGNS

CARRIAGE HOUSE


Bead Board



Long Bead Board




Recessed




TRADITIONAL


Short Panel




Long Panel



Flush Panel*



Ribbed Panel*



HR1000
Single-Layer:
Steel

HR2000
Double-Layer:
Steel + Insulation

HR3000
Triple-Layer:
Steel + Insulation + Steel

*Available in Amarr Heritage HR3000 only

HR3000
U-factor .26
R-value 9.05

Decorative Windows
Choose from DecraTrim window inserts or SlimLine windows to coordinate with your home. SlimLine windows available for HR3000 Flush and Ribbed panel designs only. See page 14 for all window options.

COLORS

Actual paint colors may vary from samples shown. Price upcharge applies to all colors except True White.

True White (TW)
Almond (AL)
Wicker Tan (WK)
Sandtone (ST)
Terratone (TT)
Dark Brown (DN)
Charcoal Gray (EF)
Black (BL)


Walnut (NT)
Mahogany (MY)

Amarr® Color Zone

See page 18 for more information.


Woodgrain finishes are dual directional for all panel designs.

MOSAIC WINDOWS



With Mosaic Window Options you decide the number and location of the windows. Only available for HR3000 traditional designs with Standard or Impact glass.

Recessed with Thames DecraTrim (RE30)



Flush Panel (FP)* with Short Panel Obscure windows



Short Panel with Waterford DecraTrim (SP25)



Bead Board with Wagon Wheel DecraTrim (BB26)



Long Panel with Moonlite DecraTrim (LP24)



WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH[1]/MPH[2] (PSF Design Pressures)	Impact Resistant	Windows Standard	Windows Impact
Amarr Heritage HR3000 Lifetime Limited Warranty	9'	WP1-WP6/ WP5i-WP10i	90–190 mph 120–245 mph (14.3/-16.9) – (57.0/-67.5)	Yes[3]	SP, LP[3], SL[3] MOSAIC	SP[3], LP[3] MOSAIC
	16'	WP1-WP5/ WP5i-WP9i	90–175 mph 117–224 mph (14.1/-14.1) – (48.0/-52.0)	Yes[3]	SP, LP[3], SL[3] MOSAIC	SP[3], LP[3] MOSAIC
	18'	WP1-WP5/ WP5i-WP8i	100–165 mph 129–212 mph (15.0/-17.0) – (40.0/-46.0)	Yes[3]	SP[3], LP[3], SL[3] MOSAIC	SP[3], LP[3] MOSAIC
	20'	WP5-WP5i	130 mph 161 mph (23.1/-26.0)	Yes[3]	SP[3], LP[3]	SP[3], LP[3]
M Miami-Dade	9'	WP7i-WP10i	155–190 mph 202–245 mph (38.7/-48.3) – (57.0/-67.5)	Yes	No	SP, LP MOSAIC
	16'	WP6i-WP9i	155–175 mph 202–225 mph (37.0/-45.0) – (48.0/-52.0)	Yes	No	SP[3], LP[3] MOSAIC
	18'	WP7i-WP8i	155–165 mph 203–212 mph (37.0/-44.5) – (42.0/-46.0)	Yes	No	SP, LP MOSAIC
Amarr Heritage HR1000 and HR2000 Lifetime Limited Warranty	9'	WP1-WP8/ WP5i-WP10i	90–189 mph 123–244 mph (14.3/-16.0) – (57.0/-67.0)	Yes[3]	SP[3], LP[3]	SP[3]
	16'	WP1-WP5/ WP5i-WP10i	90–185 mph 116–239 mph (12.3/-13.9) – (51.9/-58.9)	Yes[3]	SP[3], LP[3]	SP[3]
	18'	WP1-WP5/ WP5i-WP10i	90–180 mph 116–232 mph (12.2/-13.8) – (48.6/-55.0)	Yes[3]	SP[3], LP[3]	SP[3]
M Miami-Dade	9'	WP8i-WP10i	169–189 mph 214–244 mph (45.3/-51.2) – (57.0/-67.0)	Yes	No	SP[3]
	16'	WP7i-WP10i	156–185 mph 202–239 mph (38.0/-42.0) – (57.9/-58.9)	Yes	No	SP[3]
	18'	WP8i-WP10i	165–180 mph 212–232 mph (42.0/-46.0) – (48.6/-55.0)	Yes	No	SP[3]

Tested in accordance with DASMA TDS-108 [1]Based on ASCE7-05 [2]Based on ASCE7-10 [3]Option available on select models

Verified thermal performance rating per DASMA Thermal Performance Verification Program. See page 19 for more information.



Northwoods in Cedar with SlimLine windows

AMARR NORTHWOODS

The printed horizontal plank design on a ribbed section creates depth, texture and subtle dimension.

A perfect complement to modern, mid-century modern, and traditional architectural styles.

Northwoods in Aspen Gray with Long Panel Clear windows






Cedar



Aspen Gray


DESIGNS

Ribbed Panel




Decorative Windows
Choose from standard Short Panel or Long Panel windows with color matched frames or the new SlimLine window (Black frame only) to coordinate with your home's design. See page 14 for window options.

NW3138
1-3/8" Triple-Layer: Steel + Insulation + Steel



R-value 6.48

NEW **NW3000**
2" Triple-Layer: Steel + Insulation + Steel: 24 ga.



R-value 9.05

COLORS

Pattern may vary from samples shown.



Aspen Gray
(AGP)



Cedar
(CEP)

The printed horizontal plank design creates depth, texture, and dimension.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH[1]/MPH[2] (PSF Design Pressures)	Impact Resistant	Windows Standard	Windows Impact
Amarr Northwoods NW3000 12-Year Limited Warranty	9'	WP1-WP6/ WP5i-WP10i	90 – 190 mph 120 – 245 mph (14.3/-16.9) – (57.0/-67.5)	Yes[3]	SP, LP[3], SL[3] MOSAIC	SP[3], LP[3] MOSAIC
	16'	WP1-WP5/ WP5i-WP9i	90 – 175 mph 117 – 224 mph (14.1/-14.1) – (48.0/-52.0)	Yes[3]	SP, LP[3], SL[3] MOSAIC	SP[3], LP[3] MOSAIC
	18'	WP1-WP5/ WP5i-WP8i	100 – 165 mph 129 – 212 mph (15.0/-17.0) - (40.0/-46.0)	Yes[3]	SP[3], LP[3], SL[3] MOSAIC	SP[3], LP[3] MOSAIC
M Miami-Dade	9'	WP7i-WP10i	155 - 190 mph 202 - 245 mph (38.7/-48.3) - (57.0/-67.5)	Yes	No	SP, LP MOSAIC
	16'	WP6i-WP9i	155 - 175 mph 202 - 225 mph (37.0/-45.0) - (48.0/-52.0)	Yes	No	SP[3], LP[3] MOSAIC
	18'	WP7i-WP8i	155 - 165 mph 203 - 212 mph (37.0/-44.5) - (42.0/-46.0)	Yes	No	SP, LP MOSAIC
Amarr Northwoods NW3138 12-Year Limited Warranty	9'	WP1-WP5/ WP5i-WP7i	95 - 155 mph 122 - 200 mph (14.3/-16.9) - (38.0/-45.0)	Yes[3]	SP[3], LP[3], SL[3]	SP[3], LP[3]
	16'	WP1-WP5/ WP5i-WP7i	90 - 130 mph 116 - 155 mph (12.3/-13.9) - (25.6/-29.1)	Yes[3]	SP[3], LP[3], SL[3]	SP[3], LP[3]
	18'	WP1-WP5/ WP5i	90 - 130 mph 116 - 168 mph (12.2/-13.8) - (25.4/-28.7)	Yes[3]	SP[3], LP[3], SL[3]	SP[3], LP[3]

Tested in accordance with DASMA TDS-108 [1]Based on ASCE7-05 [2]Based on ASCE7-10 [3]Option available on select models



Long Panel design in True White

AMARR LINCOLN

Exceptional value: Energy efficient, 2" thick traditional style garage doors with conventional hardware at competitive prices.


Short Panel design with Cascade DecraTrim windows in Wicker Tan





DESIGNS

Short Panel | Long Panel | Flush Panel* | Ribbed Panel†



* LI1000 / LI2000 Flush Panel has stucco texture; LI3000 has woodgrain texture.

† Available in LI3138 only.

LI1000
Single-Layer: Steel

LI2000
Double-Layer: Steel + Insulation

LI3138
1-3/8" Triple-Layer: Steel + Insulation + Steel

LI3000
2" Triple-Layer: Steel + Insulation + Steel

LI3000 U-factor .23

R-value 9.05

Decorative Windows
Choose from DecraTrim window inserts or SlimLine windows to coordinate with your home. SlimLine windows available for LI3138/LI3000 Flush and Ribbed panel designs only. See page 14 for all window options.

COLORS

Actual paint colors may vary from samples shown. Price upcharge applies to all colors except True White.

True White (TW)* | Almond (AL)* | Wicker Tan (WK) | Sandtone (ST)* | Terratone (TT) | Dark Brown (DN)* | Charcoal Gray (EF) | Black (BL)

Amarr® Color Zone

See page 18 for more information.

Weathered Gray (WZ)* | Mahogany (MY) | Walnut (NT)

Woodgrain finishes are dual directional for all panel designs.

* Available in LI1000/LI2000 Flush Panel design with stucco texture.

† Available in L13138/L13000 only.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH[1]/MPH[2] (PSF Design Pressures)	Impact Resistant	Windows Standard	Windows Impact
Amarr Lincoln LI3000	9'	WP1-WP6/ WP5i-WP7i	90 – 155 mph 123 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes[3]	SP[3], LP[3], SL[3]	SP[3], LP[3]
Lifetime Limited Warranty	16'	WP1-WP5/ WP5i-WP7i	90 – 155 mph 116 – 200 mph (12.3/-13.9) – (36.4/-41.4)	Yes[3]	SP[3], LP[3], SL[3]	SP[3], LP[3]
	18'	WP1-WP5/ WP5i-WP7i	90 – 155 mph 116 – 200 mph (12.2/-13.8) – (36.1/-40.8)	Yes[3]	SP[3], LP[3], SL[3]	SP[3], LP[3]
Amarr Lincoln LI3138	9'	WP1-WP5/ WP5i-WP7i	95 – 155 mph 122 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes[3]	SP[3], LP[3], SL[3]	SP[3], LP[3]
Lifetime Limited Warranty	16'	WP1-WP5/ WP5i-WP7i	90 – 130 mph 116 – 155 mph (12.3/-13.9) – (25.6/-29.1)	Yes[3]	SP[3], LP[3], SL[3]	SP[3], LP[3]
	18'	WP1-WP5/ WP5i	90 – 130 mph 116 – 168 mph (12.2/-13.8) – (25.4/-28.7)	Yes[3]	SP[3], LP[3], SL[3]	SP[3], LP[3]
Amarr Lincoln LI1000 and LI2000	9'	WP1-WP8/ WP5i-WP8i	90 – 169 mph 116 – 218 mph (12.8/-15.1) – (45.2/-53.4)	Yes[3]	SP[3], LP[3]	SP[3]
15-Year Limited Warranty	16'	WP1-WP5/ WP5i-WP7i	90 – 156 mph 116 – 202 mph (12.3/-13.9) – (38.0/-42.0)	Yes[3]	SP, LP[3]	SP[3]
25-Year Limited Warranty	18'	WP1-WP6/ WP5i-WP7i	90 – 155 mph 116 – 200 mph (12.2/-13.8) – (37.0/-40.6)	Yes[3]	SP	SP[3]

Tested in accordance with DASMA TDS-108 [1]Based on ASCE7-05 [2]Based on ASCE7-10 [3]Option available on select models

Verified thermal performance rating per DASMA Thermal Performance Verification Program. See page 19 for more information.

STEEL OPTIONS

GLAZING OPTIONS

Clear (C)



Obscure (O)*



*Price upcharge applies.

Frost (WF)†



Dark Tint (WD)†



†Available in Standard and Impact glass; price upcharge applies.

AMARR CLASSICA TOP SECTIONS

Closed Arch • Available for Tuscany (T1), Santiago (S1), Lucern (L1), Valencia (V1), Cortona (C1)



Closed Square • Cortona (C2)



Closed Arch • Northampton (N1)



Closed Square • Northampton (N2)



Closed Arch • Bordeaux (B1)



Closed Square • Bordeaux (B2)



Closed Square • Available for Tuscany (T2), Santiago (S2), Lucern (L2), Valencia (V2)



Closed Double Arch Available for Tuscany (T1D), Santiago (S1D), Lucern (L1D), Valencia (V1D), Cortona (C1D)



No Insert



Danube (4)*



Madeira (5)*



Nile (6)*



Rhine (7)*



Seine (8)*



Thames (10)*



*Window inserts shown on Clear glass. Design also available with Obscure, Frost or Dark Tint glass.

AMARR CARRIAGE COURT TOP SECTIONS

FOR DESIGNS AVAILABLE WITH WINDOWS

Available for Laurelbay, Pinetop, Bradberry, Kensington, Seabrook and Rosemont.

Available with Clear or Obscure glass only.

Closed Square (104)



Closed Arch (105)



Clear Square (115)



Clear Arch (114)



3 Lite Square (106)



3 Lite Arch (110)




4 Lite Square (107)



4 Lite Arch (111)



6 Lite Square (112)



6 Lite Arch (108)



8 Lite Square (113)




8 Lite Arch (109)



FOR DESIGNS NOT AVAILABLE WITH WINDOWS

Available for Ashley, Charlton, Fairfield, Middleton, Greenbriar, Darby, Newberry and Tanglewood:

Closed Square (104)



Closed Arch (105)



SLIMLINE WINDOW NEW





SlimLine window size is the same width and half the height of a standard Long Panel window.

Available in black or white frames only. Available for Heritage HR3000, Lincoln LI3138/LI3000 Flush and Ribbed Panel designs only, Northwoods NW3138/NW3000 (Black frame only). Available in Clear, Frost and Dark Tint single-pane or insulated glass.

DECRATRIM WINDOW INSERTS

Available with Clear, Obscure, Frost or Dark Tint glass.

SHORT PANEL

Short Panel DecraTrim inserts available for Heritage, Stratford, and Lincoln collections.

No Insert



Stockton (20)



Prairie (21)



Cathedral (22)



Cascade (23)



Waterford (25)

Wagon Wheel (26)

Sunray (27)

Full Sunray (28) Available for 16', 17' and 18' widths only.

Five Piece Sunray (29) 10' in True White only.

LONG PANEL

Long Panel DecraTrim inserts available for Heritage, Stratford, Lincoln, Oak Summit, and Hillcrest collections.

No Insert

Stockton (20)

Prairie (21)

Cathedral (22)

Cascade (23)

Moonlite (24)

Waterford (25)

Wagon Wheel (26)

Sunray (27)

Thames (30)

Arched Thames (31)

Full Sunray (28) Available for 15'6", 15'8", 16', 17' and 18' widths only.

DECORATIVE HARDWARE

ALUMINUM Available for Amarr Carriage Court, Classica, Designer's Choice, Heritage‡, and Hillcrest collections.

9" Handles

18" Strap Hinges With Clavos*

11" L-Hinge With Clavos*

VERSAILLES

10-½" Handles†

17" Strap Hinges With Clavos*

3-½" Ring Handles

CANTERBURY

*Hinges with Clavos not recommended for arched openings. †Not for use with high lift installations.

STAMPED STEEL Available for Amarr Carriage Court, Classica, Designer's Choice, Heritage‡, and Hillcrest collections.

11" Handles

16" Strap Hinges

BLUE RIDGE

AMARR LOCK

Available for Heritage, Lincoln and Olympus collections.

11" Handles

ALPINE

MAGNETIC ABS VINYL Available for Amarr Classica, Designer's Choice, Heritage‡, and Hillcrest collections.

12" Handles

16" Strap Hinges

CASTLE ROCK

11" Handles

18" Strap Hinges

MAPLE CREEK

4" Ring Handles (with removable backer plate)

10" tall

5" tall

18" STRAP HINGES

NOTTINGHAM

1-3/4" CLAVOS

CLAVOS

‡Carriage House designs only



Terry design with studs and R.H. Hunt gate latch (custom stain by homeowner)



Cast effect with Sentinel Copper surface

Miami-Dade M

SPECIALTY


AMARR BY DESIGN AD4000

Meticulously handcrafted for reliable performance.

These all-natural wood doors add striking beauty and value to your home. Unlimited custom designs available.

AD4000
Triple-Layer:
Wood + Insulation + Wood

AD4000
R-value
9.00



Custom designs available. Simply draw your own unique door, give it to your Amarr dealer, and we'll take it from there.

WOOD CHOICES

Other types of wood available upon request. Doors shipped natural.

Clear Vertical Grain Cedar



Incense Cedar



Red Grandis



Mahogany




WIND LOAD APPROVALS

Exposure B with mean roof height < 30'	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH[1]/MPH[2] (PSF Design Pressures)	Impact Resistant	Windows Standard	Windows Impact
Amarr by Design AD4000 1-Year Limited Warranty	10'	WP6-WP8/ WP6i-WP9i	142 – 176 mph 194 – 229 mph (37.0/-37.0) – (50.0/-57.0)	Yes[3]	Yes	Yes[3]
	16'	WP7/WP7i	158 mph 205 mph (40.0/-43.0)	Yes[3]	Yes	No
	18'	WP3-WP7/ WP5i-WP7i	111 – 159 mph 144 – 207 mph (21.0/-21.0) – (43.0/-43.0)	Yes[3]	Yes	Yes[3]
M Miami-Dade[4] Doors are available up to 14' tall or a max weight of 635 lbs.	10'	WP8i-WP10i	169 – 185 mph 214 – 240 mph (45.3/-51.2) – (50.0/-62.0)	Yes	No	No

[1] Based on ASCE7-05 [2] Based on ASCE7-10 [3] Option available on select models.
[4] Miami-Dade wood doors require wood-on-steel base construction.

AXOLOTL FOR AMARR AX3592

The Axolotl for Amarr collection of luxurious residential & commercial garage doors combine the high-quality Amarr 3552 aluminum frame with Axolotl's award-winning, sustainable, architectural surfaces.

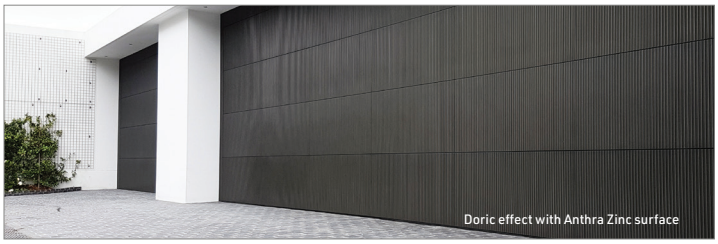

Doric effect with Anthra Zinc surface

EFFECTS

Doric




Cortex



Lunar



Smooth



Cast



WIND LOAD APPROVALS

Exposure B with mean roof height < 30'	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH[1]/MPH[2] (PSF Design Pressures)	Impact Resistant	Windows Standard	Windows Impact
Axolotl for Amarr AX3592 5-Year Limited Warranty	9'4"	WP6	140 mph 181 mph (28.2/-33.1)	No	No	No
	16'2"	WP5	130 mph 169 mph (23.5/-26.7)	No	No	No

[1] Based on ASCE7-05 [2] Based on ASCE7-10



Amarr Horizon HO1000 with Dark Bronze finish and Frost glass

AMARR HORIZON HO1000


Gain a unique perspective for your home. The Amarr Horizon HO1000 combines strong horizontal lines with long, narrow expanses of glass to make a distinctive design statement. These sleek, contemporary, aluminum doors are available with dozens of glazing and color options, so your choices are practically limitless, and the outlook is always bright.

DOOR CONFIGURATIONS

FOR SINGLE PANE GLAZING



FOR INSULATED GLAZING



FOR SINGLE PANE GLAZING		
Door Width	# Center Stiles	# Windows/Section
Up to 8' 2"	0	2
8' 3" – 16' 2"	1	4
16' 3" – 20' 2"	2	6

FOR INSULATED GLAZING		
Door Width	# Center Stiles	# Windows/Section
Up to 10' 2"	1	4
10' 3" – 16' 2"	2	6
16' 3" – 20' 2"	3	8

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH[1]/MPH[2] (PSF Design Pressures)	Impact Resistant	Glass Available	
					Standard	Impact
Amarr Horizon HO1000	16'	WP3-WP4	120-130 mph 163-169 mph (21.8/-24.8 - (23.0/-26.0)	No	Yes	No
5-Year Limited Warranty	18'	WP2-WP5	104-130 mph 134-168 mph (14.7/-16.6) - (23.0/-26.0)	No	Yes	No

[1] Based on ASCE7-05 [2] Based on ASCE7-10

COLORS - HORIZON AND VISTA

IN STOCK

ANODIZE



PAINT


White Powder Coat (WH)


SPECIAL ORDER

ANODIZE

Longer lead time and price upcharge may apply.



CONSTRUCTION

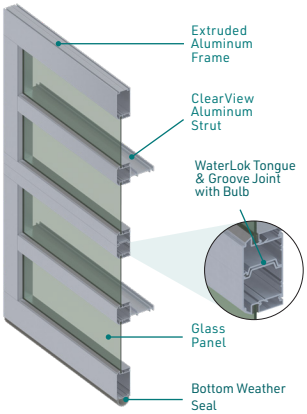

ALUMINUM

An Amarr Horizon HO1000 multiview door offers unique styling to match any modern architecture.

- Extruded aluminum frame provides durability, low maintenance and corrosion resistance
- **WaterLok** joint sealing system featuring new and improved wide tongue and groove section joints with leading-edge bulb seal and bottom weather seal for enhanced air-tight and water-resistant performance
- ClearView Aluminum Strut System does not restrict viewing area and adds strength and durability
- Equal glass heights in all sections of a door
- Glass expanses up to 8'2" wide


Exterior Handles (2 Included)

GLASS - HORIZON AND VISTA

TRANSPARENT



OPAQUE



*Laminated, not tempered. Insulated glass not available.


Clear Anodized frame with Obscure glass windows

AMARR VISTA VI1000

It's the perfect reflection of your style. The modern industrial look goes residential with the introduction of the Amarr Vista collection. From the outside, these sleek doors perfectly mirror the clean lines and glass expanses of your home's contemporary design. Inside, they transform your garage into a bright and inviting room.

DOOR CONFIGURATIONS



WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH[1]/MPH[2] (PSF Design Pressures)	Impact Resistant	Glass Available	
					Standard	Impact
Amarr Vista VI1000 5-Year Limited Warranty	9'	WP6	140 mph 180 mph (28.2/-33.1)	No	Yes	No
	12'	WP1-WP6	90 – 140 mph 116 – 181 mph (11.4/-13.1) – (27.6/-31.7)	No	Yes	No
	16'	WP1-WP7	90 – 150 mph 116 – 194 mph (11.1/-12.6) – (31.2/-35.3)	No	Yes	No
	18'	WP5	132 mph 171 mph (23.8/-26.8)	No	Yes	No
	20'	WP2	104 mph 135 mph (14.7/-16.5)	No	Yes	No
	24'	WP2	104 mph 136 mph (14.7/-16.5)	No	Yes	No

[1] Based on ASCE7-05 [2] Based on ASCE7-10

SPECIAL ORDER


PAINT PVDF (Kynar®) & Powder Coat

Longer lead time and price upcharge may apply.



†PVDF only.

	PVDF (Kynar®)	Powder Coat
FADE RESISTANT	++	+
CORROSION RESISTANT	++	+
UV RESISTANT	++	+
ABRASION RESISTANT	+	++
STANDARD COLORS	26	21
RAL/CUSTOM COLOR PRICE UPCHARGE	$	$$
TOUCH-UP PAINT	Included	NOT included




Glass is tempered and available as single pane or insulated.

TINT




OPTIONAL PANELS




CONSTRUCTION

ALUMINUM

- 2" thick extruded commercial-grade aluminum frame provides durability, low maintenance and corrosion resistance
- **WaterLok** joint sealing system featuring new and improved wide tongue and groove section joints with leading-edge bulb seal and bottom weather seal for enhanced air-tight and water-resistant performance.
- ClearView Aluminum Strut System does not restrict viewing area and adds strength and durability to doors 16' to 24' wide
- Wind load options to meet local building codes
- Attractive, modern exterior handles (2) included
- Available in 1" width increments up to 24'

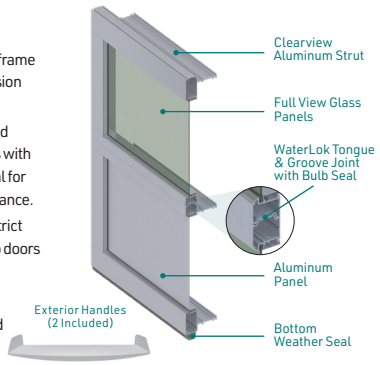

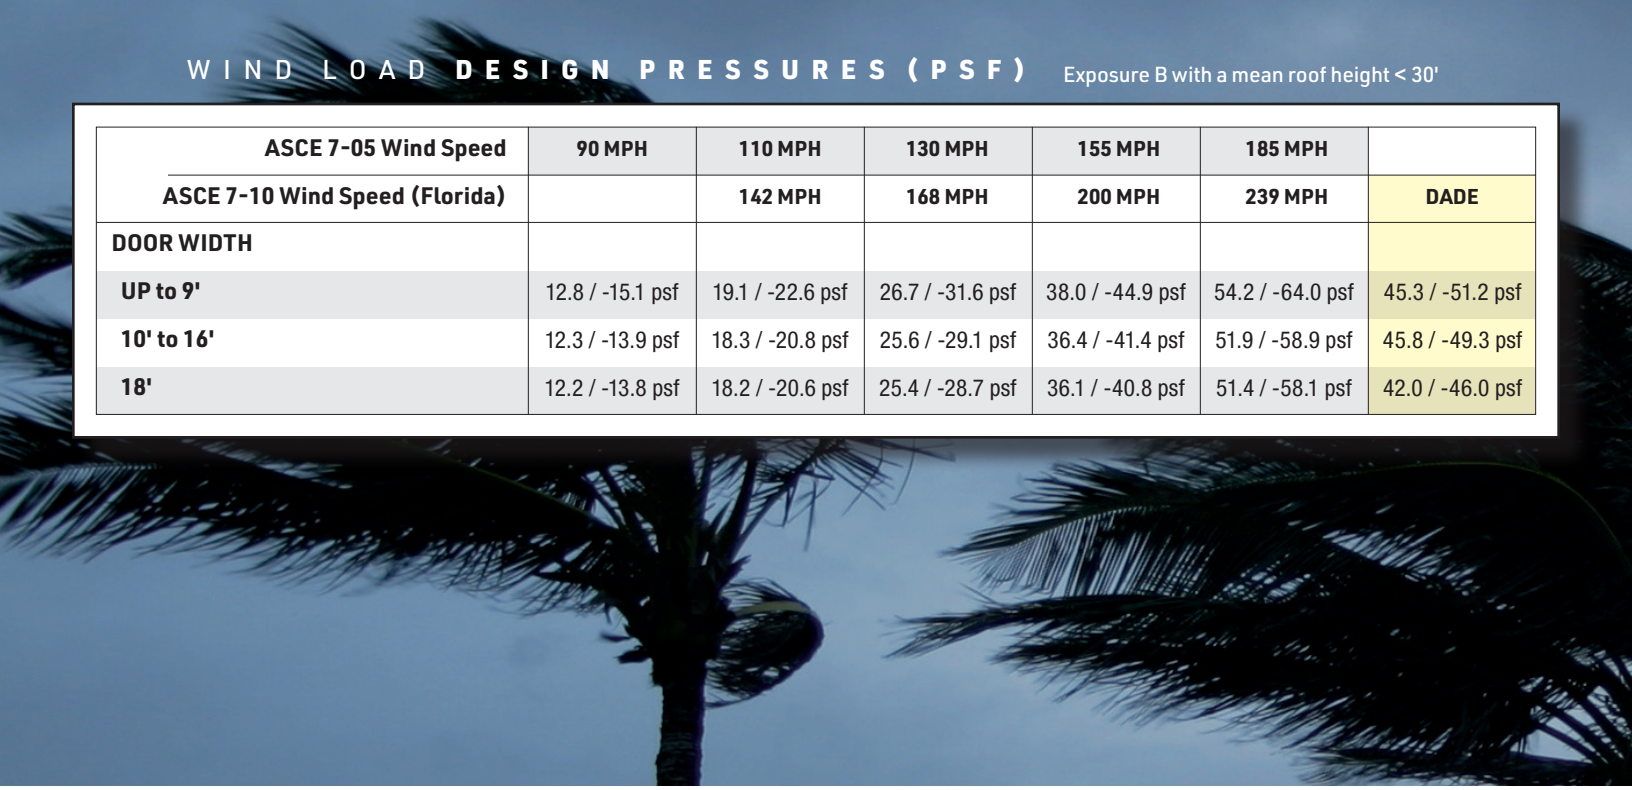

WIND LOAD **DESIGN PRESSURES (PSF)** Exposure B with a mean roof height < 30'

ASCE 7-05 Wind Speed	90 MPH	110 MPH	130 MPH	155 MPH	185 MPH	
ASCE 7-10 Wind Speed (Florida)		**142 MPH**	**168 MPH**	**200 MPH**	**239 MPH**	**DADE**
DOOR WIDTH						
UP to 9'	12.8 / -15.1 psf	19.1 / -22.6 psf	26.7 / -31.6 psf	38.0 / -44.9 psf	54.2 / -64.0 psf	45.3 / -51.2 psf
10' to 16'	12.3 / -13.9 psf	18.3 / -20.8 psf	25.6 / -29.1 psf	36.4 / -41.4 psf	51.9 / -58.9 psf	45.8 / -49.3 psf
18'	12.2 / -13.8 psf	18.2 / -20.6 psf	25.4 / -28.7 psf	36.1 / -40.8 psf	51.4 / -58.1 psf	42.0 / -46.0 psf

STEEL **SPECIFICATIONS**

	CARRIAGE HOUSE DESIGN													TRADITIONAL			
	AMARR CARRIAGE COURT CC4000	AMARR CLASSICA CL1000	AMARR CLASSICA CL2000	AMARR CLASSICA CL3000	AMARR HILLCREST HI1000	AMARR HILLCREST HI2000	AMARR HILLCREST HI3138	AMARR HILLCREST HI3000	AMARR DESIGNER'S CHOICE DC3138	AMARR DESIGNER'S CHOICE DC3200	AMARR HERITAGE HR1000	AMARR HERITAGE HR2000	AMARR HERITAGE HR3000	AMARR NORTHWOODS NW3138	AMARR NORTHWOODS NW3000	AMARR LINCOLN LI1000	AMARR LINCOLN LI2000
PANEL DESIGNS																	
Short											•	•	•			•	•
Long											•	•	•			•	•
Flush				•									•			•[5]	•[5]
Ribbed													•	•	•		
Long Recessed																	
Carriage House	18 Designs	7 Designs	7 Designs	7 Designs	3 Designs	3 Designs	3 Designs	3 Designs	1 Design	3 Designs	3 Designs	3 Designs	3 Designs				
CONSTRUCTION LAYERS	4	1	2	3	1	2	3	3	3	3	1	2	3	3	3	1	2
Steel		•			•						•					•	
Steel + Insulation			•			•						•					•
Steel + Insulation + Steel				•			•	•	•	•			•	•	•		
Overlay + Steel + Insul. + Steel	•																
DOOR THICKNESS	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	1-3/8" (3.5cm)	2" (5.1cm)	1-3/8" (3.5cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	1-3/8" (3.5cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)
INSULATION	Polystyrene[1]		Polystyrene[1]	Polyurethane		Polystyrene[1]	Polystyrene[1]	Polystyrene[1]	Polyurethane	Polyurethane		Polystyrene[1]	Polystyrene[1]	Polystyrene[1]	Polystyrene[1]		Polystyrene[1]
U-FACTOR	.026		0.32	0.22		0.32	0.27	0.23	0.24	0.19*		0.43	0.26	0.27	0.26		0.32
R-VALUE[2]	6.48		6.64	13.35		6.64	6.48	9.05	14.46	19.40*/13.35**		6.64	9.05	6.48	9.05		6.64
STEEL THICKNESS																	
Gauge (ga)	27/27 ga	24 ga	24 ga	25/27 ga	25 ga	25 ga	27/27 ga	27/27 ga	27/27 ga	27/27 ga	24 ga	24 ga	24/27 ga	27/27 ga	24/27 ga	25 ga	25 ga
Gauge (mm)	0.42/0.42mm	0.61mm	0.61mm	0.53/0.42mm	0.53mm	0.53mm	0.42/0.42mm	0.42/0.42mm	0.42/0.42mm	0.42/0.42mm	0.61mm	0.61mm	061/0.42mm	042/0.42mm	061/0.42mm	0.53mm	0.53mm
THERMAL SEAL									•	•*			•		•		
EXTERIOR COLOR OPTIONS																	
True White (TW)	•[3]	•	•	•	•	•	•	•	•	•	•	•	•			•	•
Almond (AL)	•[3]	•	•	•	•	•	•	•		•	•	•	•			•	•
Wicker Tan (WK)	•	•	•	•	•	•	•	•		•	•	•	•			•	•
Sandtone (ST)	•[3]	•	•	•	•	•	•	•		•	•	•	•			•	•
Terratone (TT)		•	•	•	•	•	•	•			•	•	•			•	•
Dark Brown (DN)		•	•	•	•	•	•	•		•	•	•	•			•	•
Charcoal Gray (EF)		•	•	•	•	•	•	•			•	•	•			•	•
Black (BL)		•	•	•	•	•	•	•		•	•	•	•			•	•
Golden Oak (OK)		•	•	•													
Walnut (NT)		•	•	•	•	•	•	•		•	•	•	•			•	•
Mahogany (MY)		•	•	•	•	•	•	•		•	•	•	•			•	•
Weathered Gray (WZ)		•	•	•	•	•	•	•								•	•
Cedar														•	•		
Aspen Gray														•	•		
WARRANTY[4]																	
Paint Finish Warranty[4]	Lifetime	Lifetime	Lifetime	Lifetime	15 Years	25 Years	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	12 years	12 years	15 Years	25 Years
Workmanship/Hardware Wty[4]	5 Years	3 Years	5 Years	Lifetime	1 Year	2 Years	3 Years	3 Years	5 Years	Lifetime	3 Years	5 Years	Lifetime	3 Years	Lifetime	1 Year	2 Years

[1] Insulation on Amarr brand doors has passed self-ignition, flamespread, and smoke developed index fire testing.
[2] Calculated door section R-value is in accordance with DASMA TDS-163.
[3] With White Overlay.
[4] For complete warranty details, visit amarr.com or contact your local Amarr dealer.
[5] Flush Panel design has Stucco texture.

* True White Bead Board only.
** All other panels and colors except True White Bead Board.
† True White Short and Flush panel designs only.
‡ All panels and colors except True White Short and Flush panel designs

NOTE: Optional door locks and various heights and widths are available thru your local garage door dealer.

Amarr® Color Zone

Amarr Color Zone
Over 800 Sherwin-Williams SnapDry™ paint colors – approved color list is at **amarr.com/amarr_color_zone**. Your local Sherwin-Williams store can provide paint chips of selected color.

SHERWIN WILLIAMS.

WIND LOAD **AVAILABILITY** Exposure B with a mean roof height < 30'

ASCE 7-05 Wind Speed	90 MPH[1]	110 MPH[1]	130 MPH[1]	155 MPH[1]	185 MPH[1]		IMPACT RESISTANT[1]	STANDARD WINDOWS[1]		IMPACT WINDOWS[1]	
ASCE 7-10 Wind Speed (Florida)		142 MPH[1]	168 MPH[1]	200 MPH[1]	239 MPH[1]	DADE[1]		SHORT PANEL	LONG PANEL	SHORT PANEL	LONG PANEL
Amarr Carriage Court CC4000	•	•	•				•	•			
Amarr Classica CL3000	•	•	•	•			•	•		•	
Amarr Classica CL1000 / CL2000	•	•	•	•	•	•	•	•			
Amarr Hillcrest HI3000	•	•	•	•			•		•		•
Amarr Hillcrest HI3138	•	•	•				•		•		•
Amarr Hillcrest HI1000 / HI2000	•	•	•	•					•		
Amarr Designer's Choice DC3200	•	•	•	•			•		•		•
Amarr Designer's Choice DC3138	•										
Amarr Heritage HR3000	•	•	•	•	•	•	•	•	•	•	•
Amarr Heritage HR1000 / HR2000	•	•	•	•	•	•	•	•	•	•	
Amarr Northwoods NW3000	•	•	•	•	•	•	•	•	•	•	•
Amarr Northwoods NW3138	•	•	•	•			•	•	•	•	•
Amarr Lincoln LI3000	•	•	•	•			•	•	•	•	•
Amarr Lincoln LI3138	•	•	•				•	•	•	•	•
Amarr Lincoln LI1000 / LI2000	•	•	•	•				•	•		
Amarr Olympus OL3200	•	•	•	•			•				
Amarr Olympus OL3138	•									•	•
Amarr by Design AD4000		•	•	•		•	•	•	•	•	•
Axolotl for Amarr AX3592			•								
Amarr Horizon HO1000		•	•					•			
Amarr Vista VI1000	•	•	•					•			

[1] Available on select models and select door widths. Check detailed Wind Load Approval chart for each product collection.
[2] Short panel impact windows and panels are slightly misaligned by no more than 1.54"; returns and replacements not accepted. To see detailed drawing, contact sda.engineering@amarr.com
Note: Check with local municipalities for specific building requirements for your location.

DESIGN

	AMARR LINCOLN LI3138	AMARR LINCOLN LI3000	AMARR OLYMPUS OL3138	AMARR OLYMPUS OL3200
	•	•	TW	•
	•	•		•
	•	•	TW	TW
	•	•		
				•
	3	3	3	3
	•	•	•	•
	1-3/8"(3.5cm)	2"(5.1cm)	1-3/8"(3.5cm)	2"(5.1cm)
	Polystyrene[1]	Polystyrene[1]	Polyurethane	Polyurethane
	0.27	0.23	0.24	0.19[†]
	6.48	9.05	14.46	19.40[†] / 13.35[‡]
	27/27 ga	27/27 ga	27/27 ga	27/27 ga
	0.42/0.42mm	0.42/0.42mm	0.42/0.42mm	0.42/0.42mm
			•	•[†]
	•	•	•	•
	•	•		•
	•	•		•
	•	•		•
	•	•		
	•	•		•
	•	•		
	•	•		•
	•	•		•
	•	•		•
	•			
	Lifetime	Lifetime	Lifetime	Lifetime
	3 Years	3 Years	5 Years	Lifetime

Verified thermal performance rating per DASMA Thermal Performance Verification Program. For best thermal performance, select a door with a low U-factor (less heat transfer) or high R-value rating (more heat resistance).

ALUMINUM **SPECIFICATIONS**

	AMARR HORIZON HO1000
FRAME CONSTRUCTION	2" thick aluminum
SECTION HEIGHTS	Varies by door height
DOOR WIDTHS	2' – 20'2" (in 1" increments)
DOOR HEIGHTS	6' – 20'1"
CLEARVIEW STRUT SYSTEM	Only required for doors ≥ 16'
COLORS	
Anodize	Clear, Champagne, Copper, Medium Bronze, Dark Bronze, Black
Paint	26 standard PVDF colors, 21 standard Powder Coat colors, RAL and custom colors in both PVDF and Powder Coat
GLASS	
Transparent	Clear, Obscure, ThermaPro Low-E
Tint	Green, Bronze, Gray, GreyLite
Opaque	Frost, Snow, Whiteout, Black Ice
FINISH WARRANTY[2]	5 Years (RAL & Custom Paint 3 Years)
WORKMANSHIP WARRANTY[2]	5 Years
HARDWARE WARRANTY[2]	5 Years

	AMARR VISTA VI1000
FRAME CONSTRUCTION	2" thick aluminum
SECTION HEIGHTS	21" and 24"; 18" for odd height doors
COLORS	
Anodize	Clear, Champagne, Copper, Medium Bronze, Dark Bronze, Black
Paint	26 standard PVDF colors, 21 standard Powder Coat colors, RAL and custom colors in both PVDF and Powder Coat
GLASS	
Transparent	Clear, Obscure, ThermaPro Low-E
Tint	Green, Bronze, Gray, GreyLite
Opaque	Frost, Snow, Whiteout, Black Ice
OPTIONAL PANELS	Full View, Aluminum, Insulated Aluminum, Louvered, Perforated
FINISH WARRANTY[1]	5 Years
WORKMANSHIP WARRANTY[1]	5 Years
HARDWARE WARRANTY[1]	5 Years

[1] For complete warranty details contact your local Amarr dealer.

DASMA Door & Access Systems Manufacturers Association International
THERMAL PERFORMANCE VERIFICATION PROGRAM
www.dasma.com/thermal

Amarr participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of a complete sectional garage door assembly. The lower the U-factor rating, the better the thermal performance.

WOOD **SPECIFICATIONS**

	AMARR BY DESIGN AD4000
PANEL DESIGNS	
Carriage House	Unlimited Designs
CONSTRUCTION*	
Wood + Insulation + Wood	•
DOOR THICKNESS	3" (7.6cm)
R-VALUE	9.0
WOOD BASEPLY OPTIONS	
5/8" MDO Plywood (paint grade only)	•
1/2" Marine Grade Plywood	•
5/8" Incense Cedar	•
5/8" Clear Vertical Grain Cedar	•
5/8" Red Grandis	•
5/8" Mahogany	•
Other materials available upon request	•
TRIM OVERLAY OPTIONS	
5/8" Moisture-and Rot-resistant	•
Extira Exterior Panel (paint grade only)	•
5/8" Incense Cedar	•
5/8" Clear Vertical Grain Cedar	•
5/8" Red Grandis	•
5/8" Mahogany	•
Other materials available upon request	•
OPTIONAL WOOD DISTRESSING	•
SECTION HEIGHT OPTIONS	18", 21", 28" or 32"
POLYSTYRENE INSULATION (1 3/8" thick)	•
DECORATIVE WINDOW OPTIONS	
1/8" (0.32cm) Double Strength	•
Insulated	•
FIRE RATED DOORS AVAILABLE[1]	•
SECTION WARRANTY[2]	1 Year

*Optional: Wood-on-steel section construction is available. Some wind load pressures may require wood-on-steel construction.

[1] Optional: Special-designed doors meet guidelines for CA Building Codes for use in Wildlife Urban Interface (WUI). Fire-rated doors with insulated and tempered glass windows available.

[2] For complete warranty details, visit amarr.com or contact your local Amarr dealer.

Doors are shipped natural. Priming is available for paint grade doors. All doors require finishing on all six (6) sides of each section within two days of receipt of door(s) and prior to installation. Visit amarr.com for finishing recommendations.

Fairfield design with Closed Square in True White/White with Alpine decorative handles



Our Philosophy. Since 1951, we have successfully raised the standards of quality, value, and dependability in the garage door industry. Today, with the same promise of individual attention and great value for all our customers, we remain committed to offering Amarr products and services that raise those standards even higher.

Visit amarr.com for additional products, such as Amarr by Design custom wood carriage house doors, specialty doors, garage flooring, accessories, and a full line of Amarr commercial sectional, rolling slat, and rolling steel doors.

Amarr Company
165 Carriage Court
Winston-Salem, NC 27105
800.503.DOOR
www.amarr.com

MADE IN USA

RECYCLED STEEL

Amarr, Classica, and Heritage as words and logos are trademarks belonging to Amarr Company, owned by ASSA ABLOY.

Door specifications and technical data subject to change without notice.

Sectional door products from Amarr Company may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents.

©ASSA ABLOY
Printed in USA Form #6681224/3M/SPR

Part of ASSA ABLOY